


Item # Z-4602



Square Fixed Panel Clamp

GLASS REQUIREMENTS:

- 3/8" (10mm) Tempered Glass
- 1/2" (12mm) Tempered Glass


SPECIFICATIONS:

- Solid brass body and clear polyurethane gaskets
- Screws and gaskets included
- Glass cut-out required


CARES:

- Can be cleaned with water and a soft cloth
- Use of harsh or abrasive cleaners may harm finish and will void the warranty.
- Do not use power tools when installing or spray lubricant

AVAILABLE FINISHES:

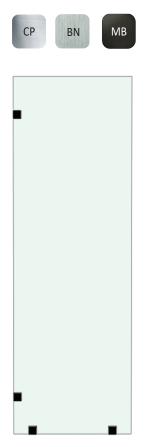


HOLE-IN-GLASS



Cut-out used when hanging glass panel from ceiling.

FINGER NOTCH GLASS CUT-OUT



Cut-out used when fixing glass panel to wall or floor.

Rev Nov, 2023

8150 NW 64th St | 2367A Tremont Rd #100 Miami, FL 33166 | Savannah, GA 31405

www.interglassusa.com

Phone: (800) 576-6044 sales@interglassusa.com